

Figure 1. Auto Thermal Incineration and Solidification/Stabilization system for sludge discharged from a leather manufacturing industry

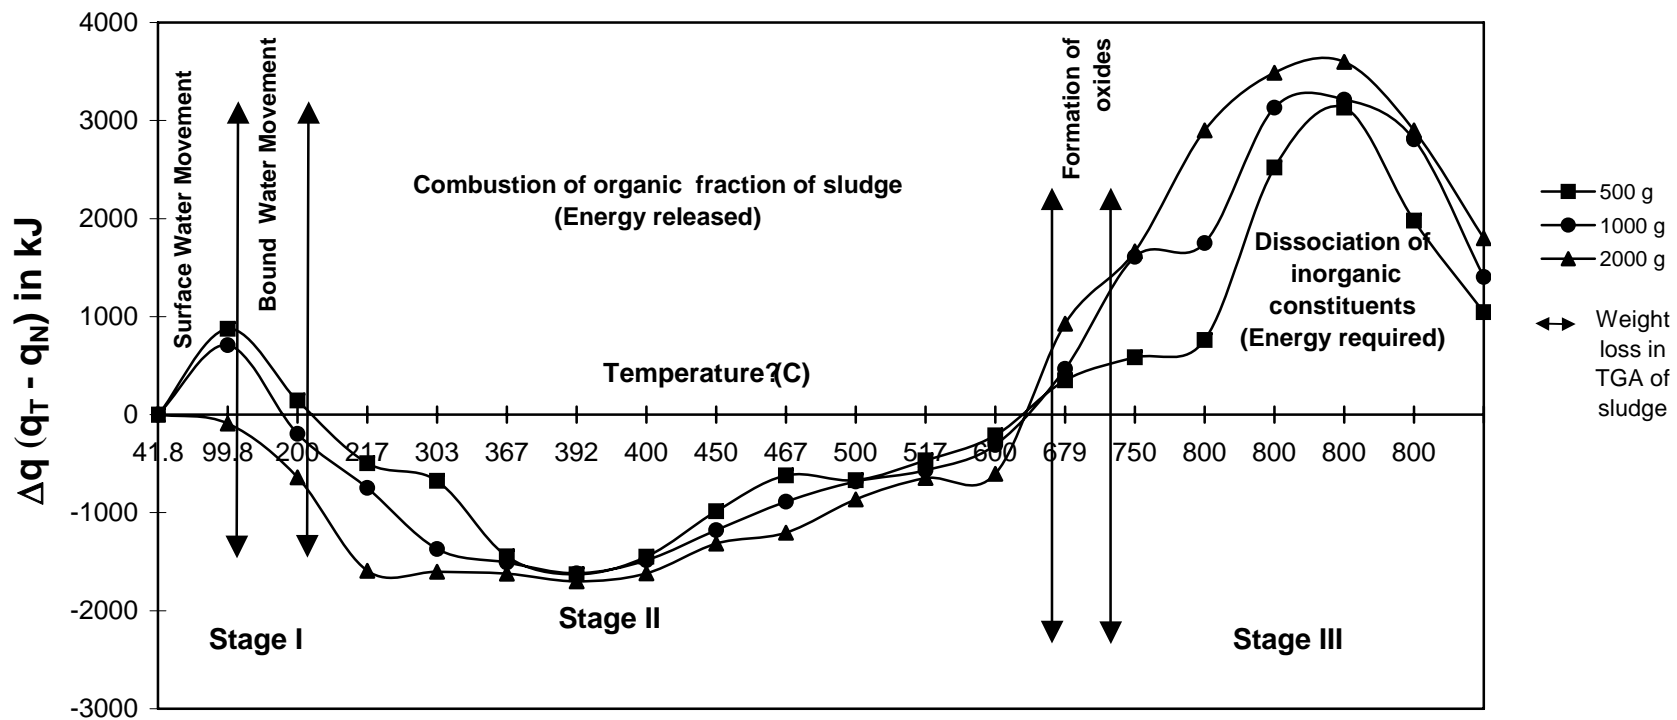


Figure 2. Net energy change (Δq) with respect to furnace temperature for various loading rate of sludge correlated with TGA

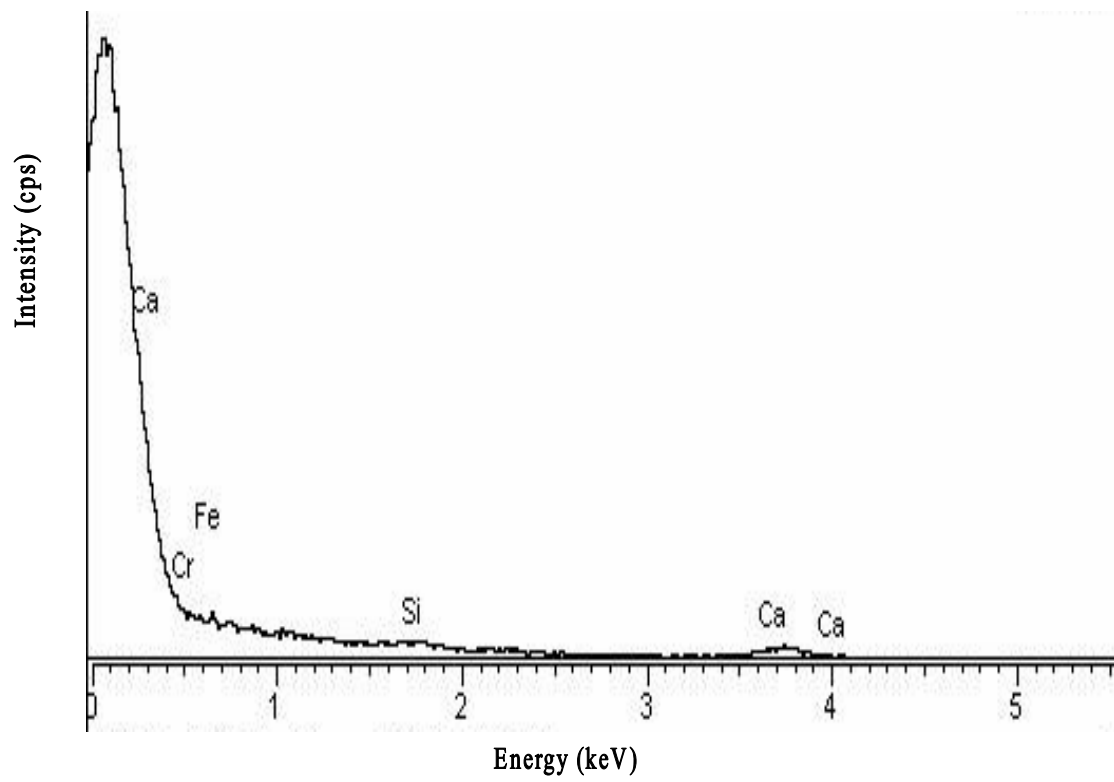


Figure 7. EDX microanalysis of the solidified specimen